


Application

Double lanyard with energy absorber provides a connecting element between a fixed or mobile anchor point and the attachment point on the harness

The energy absorber safely arrests a fall from a height. Without the shock absorber, a free fall of more than 50 cm can cause serious injury

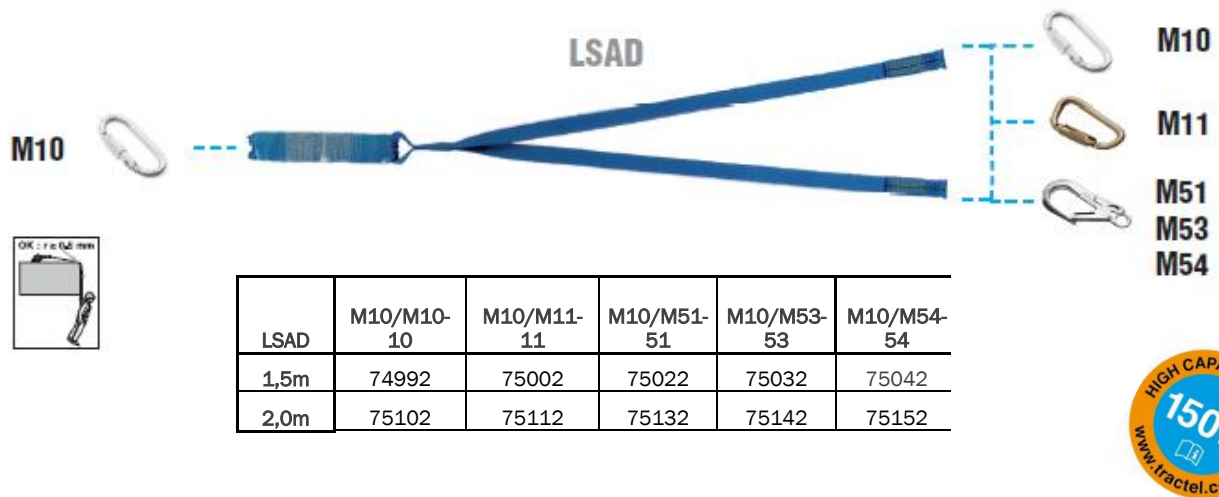

Technical characteristics

The LSAD lanyard is made up of:

A 30 mm-wide strap made of rigid polyester fibers woven with an energy absorber

Absorber lanyard

- Length (L): 1,50 m - 2 m.
- Buckled and stitched

Models:

Connector

- M11 - M10 - M51 - M41 - M12 - M42 - M53
- LSA lanyards have been tested with these connectors on each end.
- Automatic closure karabiners are fitted with stitched thimble loops.

Certification :

CE n° 0082- Organisme : APAVE (N°0082)

CNB/P/11 062

CNB/P/11 063

CNB/P/ 11 074

Norme: EN355

