

# 880 Series - Pullman Latches

882T / 882T-W / 882TL / 882TL-W

2/3 Point Locking Touch Bar Panic Device



ASSA ABLOY

## Application:


- For single doors in buildings accessed by the public, where panic can be foreseen
- Suitable for push face of outward opening doors
- May also be used on double doors with non-rebated meeting stiles (one 2 point 882T or 882T-W per leaf)
- Fixings to suit timber doors

## Specification:

- Contemporary styling combined with the technology and convenience of Pullman latches
- Pressure at any point on the touch bar withdraws the latches ensuring immediate release of door
- Easy action Pullman latches
- Rods and touch bar can be cut to size
- 2 or 3 point locking (site selectable)
- Rods with integrated cover
- Light touch operation
- Anti-thrust steel deadlatch
- Adjustable steel strikes
- Complete with signage and fixing instructions
- Non-handed for maximum flexibility
- Low projection touch bar
- Compatible with UNION 885 Outside Access Device
- Choice of upper & lower latches (882T/882T-W) or lateral latches (882TL/882TL-W)
- Lateral latches variants can be combined with upper & lower latches variants to provide 4/5 point locking on rebated double doors (see specification for 883T/883T-W)
- Max. Door Leaf Width: 900mm or 1200mm
- Max. Door Height: 2350mm
- Max. Door Leaf Mass: 200kg
- Option: Dogging device (cylinder operated)
- Supplied complete with adjustable flat, corner and floor strikes to suit various door frame overlap sizes
- Available in SIL finish as standard
- Available in GRN and WTE finishes upon request

## Finish:

- SIL - Silver touch bar & silver rods & trim (standard finish, main illustration)
- GRN - Green touch bar & silver rods & trim (inset)
- WTE - White touch bar & white rods & trim (inset)

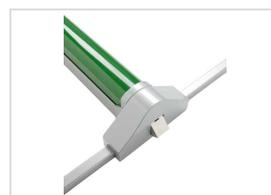

## Standards:

- CE marked to BS EN 1125 (CE mark not valid if door exceeds measurements given)
- Included in fire tests to BS EN 1634-1  

3	7	6	0*/B	1	3	2	2	B	A
---	---	---	------	---	---	---	---	---	---

\*Applies to dogging device variants only which are not suitable for fire doors
- Signage as required by BS EN 1125 annex A19, coloured green & white as detailed in BS 5499



# 880 Series - Pullman Latches


882T / 882T-W / 882TL / 882TL-W

2/3 Point Locking Touch Bar Panic Device



ASSA ABLOY

## Technical Design:

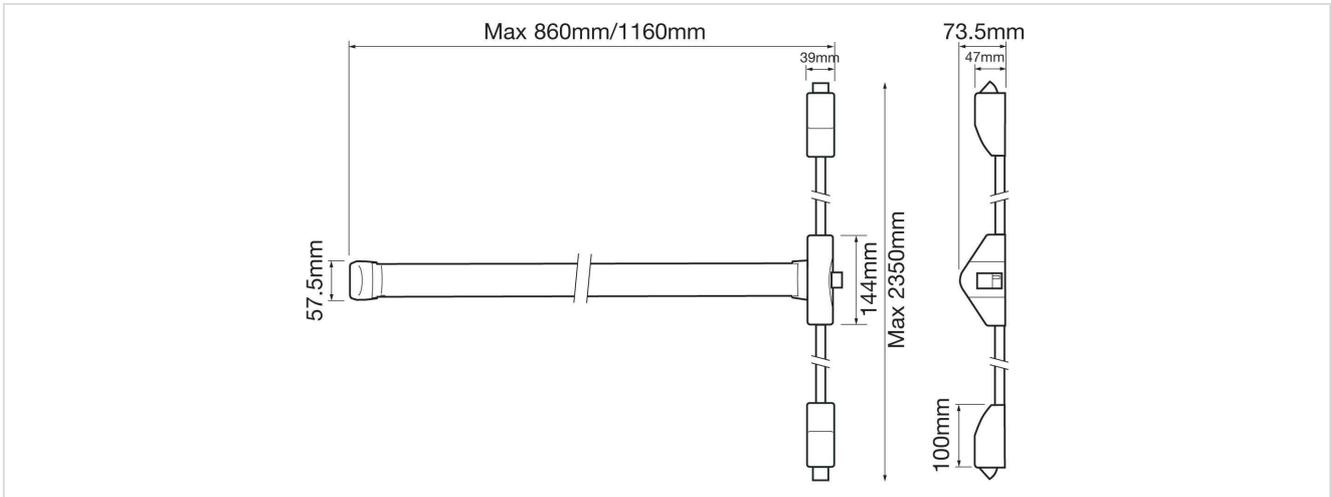

## Variants:

Code	Description
J-882T-SIL	PANIC - 2/3PT - TOUCH - 900 DR
J-882T-W-SIL	PANIC - 2/3PT - TOUCH - 1200 D
J-882TL-SIL	PANIC-3PT LAT - TOUCH - 900 DR