



The PPA is for post base installations requiring a higher standoff distance.



[ETA-07/0285](#), [UK-DoP-e07/0285](#)

FEATURES




Material

- Steel S235JR according to NF EN 10025
- Hotdip galvanized according to NF EN ISO 1461

Benefits

- No machining necessary

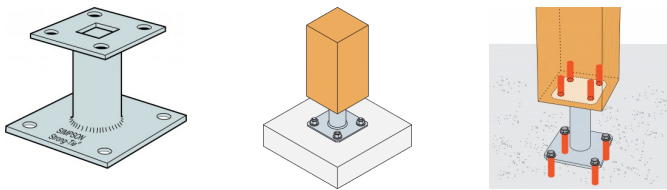

APPLICATIONS

Header member



- **Supporting member:** solid wood, glued-laminated wood, concrete
- **Supported member:** solid wood, composite lumber, glued-laminated wood

Applications

- Awning posts
- Pergola
- Veranda




TECHNICAL DATA

Product Dimensions



| References | Product Dimensions [mm] | | | | | | | Top plate holes | Bottom plate holes |
|------------|-------------------------|-----|-----|-----|-----|------|---|-----------------|--------------------|
| | A | B | D | E | F | G | t | Ø12 | Ø12 |
| PPA100 | 100 | 100 | 130 | 130 | 100 | 48.3 | 4 | 4 | 4 |

Product simplified characteristic capacities



| References | Simplified product capacities - Timber to Concrete | | | | |
|------------|--|------------|-------------|-------|--|
| | Number of Fasteners | | | | Simplified characteristic capacities - Timber C24 [kN] |
| | On post | | On concrete | | |
| | Qty | Type | Qty | Type | $R_{1,k}^*$ |
| PPA100 | 4 | LAG Ø10x80 | 4 | Ø10** | 85.7 |

*The published characteristic capacity is based on medium term load duration and service class 3 according to EC5 (EN 1995)($k_{mod} = 0.7$). For other load duration and service class, please refer to the ETA to get more accurate capacities.

** Refer to the Simpson Strong-Tie anchor product range for suitable anchors. Typical anchor solutions are SET-XP and AT-HP, depending on the concrete type, spacing and edge distances.

INSTALLATION

Fixing

On post:

- Bolts
- LAG lag screws 10 x 80 mm

On concrete:

- Mechanical anchor: WA M10-78/5 pin
- Chemical anchor: AT-HP resin + LMAS M10-120/25 threaded rod

Installation

Fix to the foundation with concrete screw/mechanical anchor or resin anchor system. Fix to the post using M10 coach screws.

- Not recommended when the top of post/column is not restrained (e.g. fence post)


ATTENTION: Post with maximum cross-section 200 x 200 mm.

The bases are always installed in the same direction:

- Plate 130 x 130 mm on the ground.
- Plate 100 x 100 mm fastened on the post.

PPRC can be adjusted with a 30 mm wrench after both the plates are attached.

PPRIX requires the use of stainless steel fasteners.

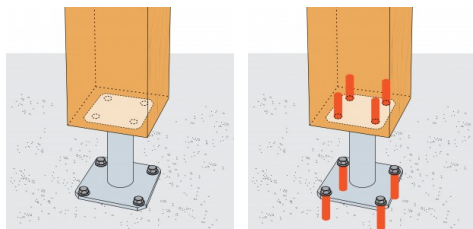

Fixations
utilisées pour
ped de poteau
type PPA