




## G7088 Dual-Profile Cylinder Mortice Night Latch with Anti-thrust Bolt



**Description** Dual profile cylinder mortice night with anti thrust bolt suitable for use on external entrance wooden hinged door providing automatic locking complete with hold back function. CE Marked door lock Fire rated to BS EN 1634-1:2000 & Performance rated to BS EN 12209. Latchbolt operated by key from outside and lever handle or turn knob inside using a single cylinder or by key from either side using a double cylinder. When the door is shut the bolt is locked against end pressure. The bolt may be held in the withdrawn position by means of a reverse turn of the key. Use with turn operated cylinders is not recommended. Supplied with striker plate and fixing screws. Finishes stainless steel (SS) or satin brass (SB). Other finishes available.

|                             |                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operation</b>            | Latchbolt operated by key from outside and lever handle or turn knob inside using a single cylinder or by key from either side using a double cylinder. When the door is shut the bolt is locked against end pressure. The bolt may be held in the withdrawn position by means of a reverse turn of the key. Use with turn operated cylinders is not recommended |
| <b>Case</b>                 | Pierced to accept 38mm centre horizontally opposed bolt through fixing furniture Pierced to accept 20mm centre bolt through fixing escutcheons                                                                                                                                                                                                                   |
| <b>Striker Plate</b>        | Type W                                                                                                                                                                                                                                                                                                                                                           |
| <b>Latchbolt</b>            | Brass, reversible. Projection 12mm                                                                                                                                                                                                                                                                                                                               |
| <b>Anti Thrust Slide</b>    | SCP, effective at door gaps up to 6mm                                                                                                                                                                                                                                                                                                                            |
| <b>Follower</b>             | Brass, to suit 8mm square spindle. One-way action. Sprung to suit sprung lever handle furniture only                                                                                                                                                                                                                                                             |
| <b>Cylinder</b>             | Not supplied. May be used with the following cylinders: a) Key outside such as Guardian G9000 or G9010 b) Key either side such as Guardian G9001 or G9011                                                                                                                                                                                                        |
| <b>Rebate Units To Suit</b> | G3073-13mm G3074-19mm G3075-25mm (Handed)                                                                                                                                                                                                                                                                                                                        |
| <b>A Lock Case</b>          | 63mm, 76mm, 101mm                                                                                                                                                                                                                                                                                                                                                |
| <b>B Backset</b>            | 45mm, 57mm, 82mm                                                                                                                                                                                                                                                                                                                                                 |
| <b>C Centres</b>            | EURO 49.5mm OVAL 50mm                                                                                                                                                                                                                                                                                                                                            |

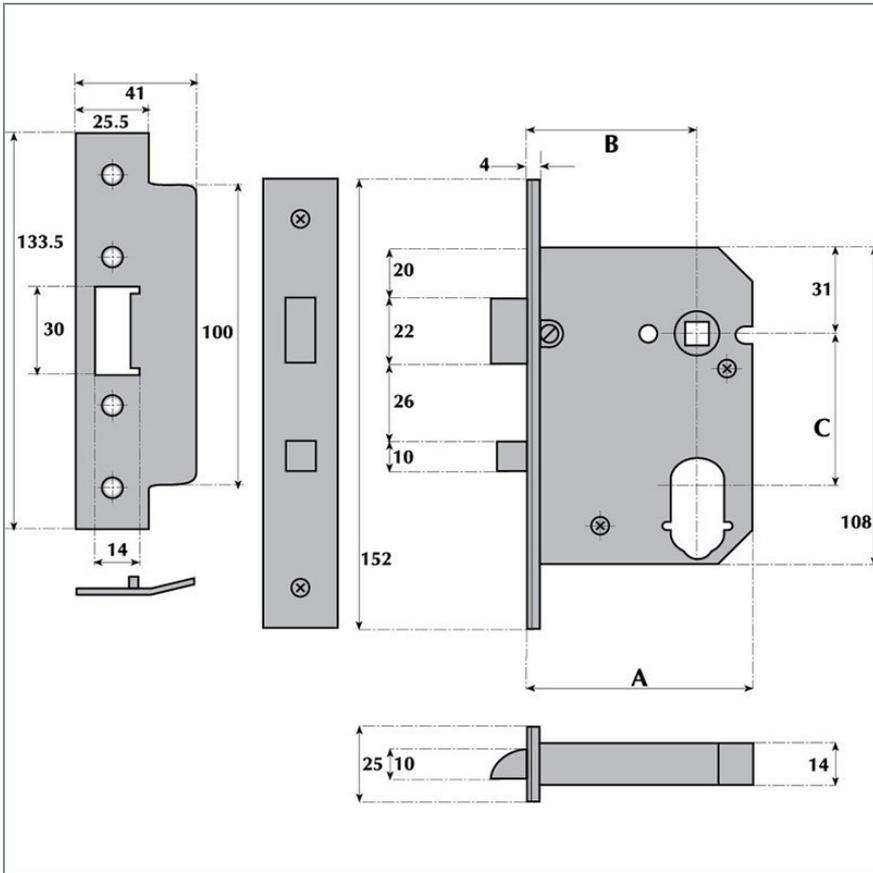

Guardian Lock & Engineering Co Ltd. Imperial Works, Wednesfield Road, Willenhall, West Midlands, WV13 1AL, United Kingdom.

+44(0)1902 635 964 | sales@imperiallocks.co.uk